

FINGER JOINTED ACCOYA FOR JOINERY

SPECIFICATION SHEET



KEY FEATURES



DIMENSIONALLY STABLE



OUTSTANDING DURABILITY



PERFECT FOR COATING

Accoya® wood is produced from sustainably sourced, fast growing wood and manufactured using Accsys' proprietary patented modification process from surface to core.



BAREFOOT FRIENDLY



NATURALLY INSULATING*



EXCELLENT MACHINABILITY



INSECT BARRIER



CONSISTANT QUALITY THROUGHOUT



NATURALLY BEAUTIFUL WOOD




FROM SUSTAINABLE SOURCES



RETAINED STRENGTH & HARDNESS



NON-TOXIC & RECYCLABLE

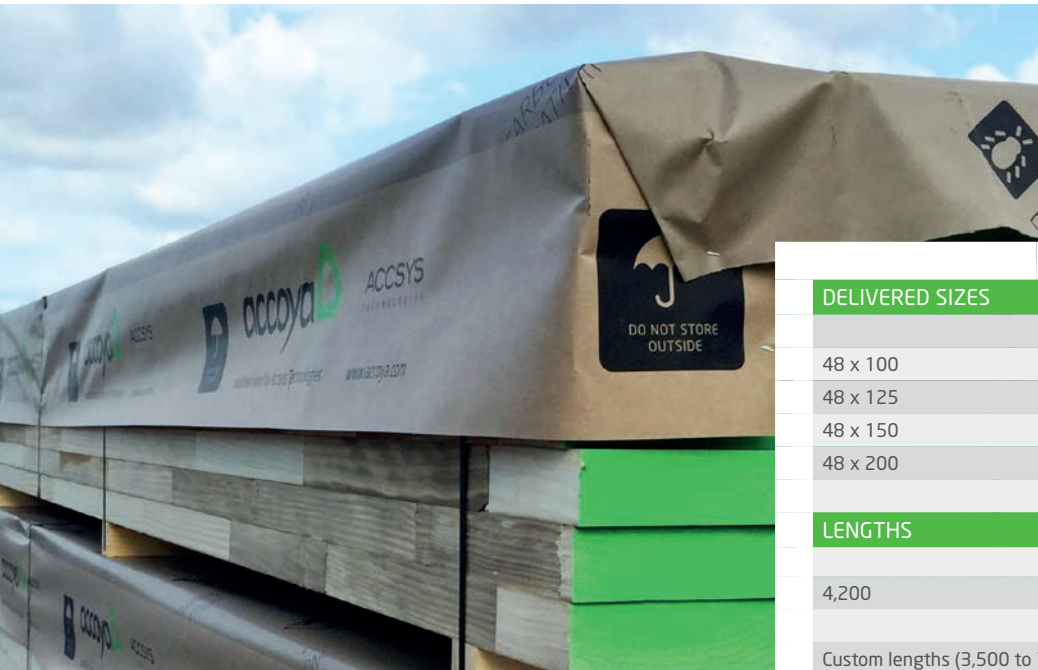

ACCOYA FINGER JOINTED SPECIFICATION

Accoya® finger jointed is bonded with EPI adhesive. It offers fixed width, engineered sections for joinery under the KOMO joinery certificate for finger joint quality. Accoya® has been finger jointed under the KOMO scheme successfully since 2007, predominantly for the Dutch market.

NOTE: Finger joints are rated for use as joinery and not in-ground.

Finger joint quality certification for opaque joinery use:



Cert. no. 33058/07
BRL 0605 Modified Timber
Accoya® is suitable for in use class 1, 2, 3 and 4 (EN 335-1)

DELIVERED SIZES

48 x 100	62 x 100	74 x 100
48 x 125	62 x 125	74 x 125
48 x 150	62 x 150	74 x 150
48 x 200	62 x 200	74 x 200

LENGTHS

4,200	4,800	6,000
-------	-------	-------

Custom lengths (3,500 to 7,100mm - 10m³ minimum order)

TOLERANCE

WIDTH	THICKNESS
-1mm / +3mm	+/- 1mm

JOINT DISTANCE

MINIMUM	TYPICAL	MAXIMUM
250mm	500mm	1,000mm

